Rockfon®

Part of ROCKWOOL Group

Rockfon Sonar®

Design Collection

Tile Performance

UP TO 0.95 NRC

UP TO 35 CAC

System Performance

UP TO 0.95 NRC

UP TO 58 CAC

See Table 3

GWP AS LOW AS

4.15 kg CO_2-eq/1m²

0.386 kg CO_2 eq/1ft²

Features & Benefits

- Premium, lightly textured white surface, Rockfon Sonar® tiles achieve ambitious design visions with the widest range of edges and sizes
- Optimal sound absorption with NRC up to 0.95, panel CAC up to 35, and system CAC up to 58
- Class A fire performance with 0 Flame Spread and 0 Smoke Developed ratings per ASTM E84
- Inherently mold and mildew resistant and do not include antimicrobials
- Low particle emission (ISO Class 5, ISO14644-1) for air cleanliness
- Sonar SQ, SLN, SL edges are compliant with the Build America, Buy America Act (BABAA)

Applications

- Suitable for New Build and Renovation
- Open Plan Office
- Private Office Space with Closed Partitions
- Education
- Retail
- Leisure
- Healthcare

GREENGUARD

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818

GOLD

High Acoustic Absorption

Class A Fire Performance

Moisture and Sag Resistance

No tile acclimatization required.
Please refer to handling guide for details.

Smooth, Modern Aesthetics

Mold and Mildew Resistance

30-year Warranty Applies to All Stone Wool Tiles and Panels

Part of Rockfon's Closed Loop Recycle Program

Rockfon Sonar®

Scan to explore Rockfon Sonar®
Sustainability Certifications and Documentation

Refer to p.4 to explore all Sonar edge types and grid compatibility.

High Performance Factors

Base Material	Stone wool
Surface	Lightly-textured white
Fire Performance	Class A Tested to US Standard ASTM E84: Flame Spread Index: 0 Smoke Developed Index: 0 Canadian Standard CAN/ULC S102: Flame Spread Rating: 10 Smoke Developed Rating: 5
Mold and Mildew Resistance	Inherently Resistant (applies to stone wool substrate and tile surfaces) Tested to ASTM D3273: 10 (Scale of 0 to 10, 10 being highest performing) Tested to ASTM C1338: Pass (Pass or Fail, Stone Wool Tiles Pass)
Sag Resistance	Won't Sag or Warp Even in 100% Relative Humidity Tested to ASTM C367
Low VOC	UL GREENGUARD Gold Certified
Warranty	30-Year Tile Warranty

Table 1

Sonar Panels

Edge Designation	Item Number	Modular Size (nominal)	NRC	CAC	AC	Fire Class	Mold & Mildew Resistance	Sag Resistance (relative humidity)	Light Reflectance	Cleanroom Class	Embodied Carbon Per 1m² (kg CO_2 - eq)	Embodied Carbon Per 1ft² (kg CO_2 - eq)	Low VOC	Recyclable	Packaging Information lbs/sqft	Packaging Information sqft/carton
SQ Square Lay-In	16100	2' x 2' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	64
	16101	2' x 4' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	64
	16102	2' x 5' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	80
	16103	2' x 6' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	96
	16104	2' x 8' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	128
	16105	30" x 30" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	50
	16106	20" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	66.67
	16107	4' x 4' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	128
SLN Square Tegular Narrow	16200	2' x 2' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	32
	16201	2' x 4' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	64
	16202	2' x 5' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	60
	16203	2' x 6' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	72
	16204	2' x 8' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	96
	16205	30" x 30" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	50
	16208	30" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	75
	16209	20" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	50
	16207	4' x 4' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	96
SL Square Tegular	16400	2' x 2' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.58	32
	16401	2' x 4' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	64
	16402	2' x 5' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	60
	16403	2' x 6' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	72
	16404	2' x 8' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.60	96
	16405	30" x 30" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	37.5
	16407	4' x 4' x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.60	96
	16409	20" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	50.04
	16305	30" x 30" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	50

Rockfon Sonar®

Table 1

Sonar Panels

Edge Designation	Item Number	Modular Size (nominal)	NRC	CAC	AC	Fire Class	Mold & Mildew Resistance	Sag Resistance (relative humidity)	Light Reflectance	Cleanroom Class	Embodied Carbon Per 1m² (kg CO_2 - eq)	Embodied Carbon Per 1ft² (kg CO_2 - eq)	Low VOC	Recyclable	Packaging Information lbs/ sqft	Packaging Information sqft/ carton
DMT Direct Mount	14350	2' x 2' x 3/4"	0.70	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	40
	14351	2' x 4' x 3/4"	0.70	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	80
	14353	2' x 6' x 3/4"	0.70	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	96
	16354	2' x 8' x 1"	0.70	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.84	96
	16355	30" x 30" x 1"	0.70	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.84	38
	16357	4' x 4' x x 1"	0.70	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.84	96
SLP Shiplap	16457	4' x 4' x 1"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.84	96
SCD Semi-Concealed	14550	2' x 2' x 3/4"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	40
	14551	2' x 4' x 3/4"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	80
	14552	2' x 5' x 3/4"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	80
	14553	2' x 6' x 3/4"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	96
	16554	2' x 8' x 1"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.84	96
	16555	30" x 30" x 1"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.84	37.5
CDX Fully Concealed	14600	2' x 2' x 7/8"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.75	0.350	✓	✓	0.75	40
	14601	2' x 4' x 7/8"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.75	0.350	✓	✓	0.75	80
	14602	2' x 5' x 7/8"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.75	0.350	✓	✓	0.75	100
	14603	2' x 6' x 7/8"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.75	0.350	✓	✓	0.75	72
	16604	2' x 8' x 1"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.75	0.350	✓	✓	0.84	96
	16605	30" x 30" x 1"	0.90	22	190	A	✓	up to 100%	0.85	ISO 5	3.75	0.350	✓	✓	0.84	37.5

Rockfon Sonar®

Table 2

Sonar Panels with HPM - CAC 33/35[1]

Edge Designation	Item Number	Modular Size (nominal)	NRC	CAC	AC	Fire Class	Mold & Mildew Resistance	Sag Resistance (relative humidity)	Light Reflectance	Cleanroom Class	Embodied Carbon: Per 1m² (kg CO_2 - eq)	Embodied Carbon: Per 1ft² (kg CO_2 - eq)	Low VOC	Recyclable	Packaging Information: lbs/ sqft	Packaging Information: sqft/ carton
 SQ Square Lay-In	16180	2' x 2' x 1"	0.85	33	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	64
	16181	2' x 4' x1"	0.85	33	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	64
	16190	2' x 2' x 1-1/2"	0.85	35	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	1.42	48
	16191	2′ x 4′ x 1-1/2"	0.85	35	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	1.42	48
 SLN Square Tegular Narrow	16280	2' x 2' x 1"	0.85	33	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	32
	16281	2′ x 4′ x1"	0.85	33	190	A	✓	up to 100%	0.85	ISO 5	3.49	0.325	✓	✓	0.69	64
	16290	2' x 2' x1-1/2"	0.85	35	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	1.42	24
	16291	2' x 4' x 1-1/2"	0.85	35	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	1.42	48
 SL Square Tegular	16480	2′ x 2′ x 1"	0.85	33	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	0.58	32
	16481	2′ x 4′ x 1"	0.85	33	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	0.59	64
	16490	2' x 2' x 1-1/2"	0.85	35	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	1.29	24
	16491	2' x 4' x 1-1/2"	0.85	35	170	A	✓	up to 100%	0.85	ISO 5	6.65	0.618	✓	✓	1.30	48

[1]HPM panels include factory-applied high-performance membrane on the back of the tile.

Table 3

System Performance with Sonar Panels - CAC 40-58[2]

Product	NRC	Plenum Barrier Board as Ceiling Panel Backer (Horizontal Application)[4]	Plenum Barrier Board as Partition Extension (Vertical Application): Single-Layer	Plenum Barrier Board as Partition Extension (Vertical Application): Double-Layer	Plenum Barrier Board
Sonar 1"	0.95[3]	46	40	52	Rockfon® Plenum Barrier Board is a stone wool noise blocking panel, which is installed over partitions inside ceiling plenums, on top of ceiling panels or under partitions in raised-floor plenums to increase sound insulation and privacy between rooms. Actual board size 2′ x 4′ x 1-1/2″ (SKU#7900) with fiber reinforce foil facing on one side. Click to access Rockfon Plenum Board datasheet.
Sonar 1" with HPM[1]	0.85	-	52	58	
Sonar 1.5" with HPM[1]	0.85	-	54	58	

[1]HPM panels include factory-applied high-performance membrane on the back of the tile.
[2]Use the system in Table 3 that provides a CAC rating at least equal to the STC rating of the partition between the rooms.
[3]Call Rockfon for SCD &CDX edge type system acoustical performance.
[4]Assumes plenum barrier applied to full ceilings both sides of walls. Contact Rockfon for performance of 1-side and not the other.

Rockfon Plenum Barrier as a ceiling panel backer

Rockfon Plenum Barrier as a partition extension

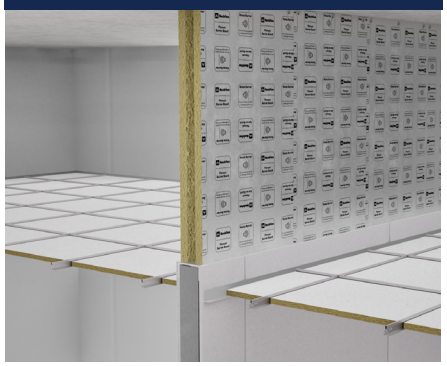

Click Here or Scan QR Code to see more information in The Ceilings Book™.

Rockfon Sonar®

Table 4

Sonar Module Tiles

Edge Designation	Item Number	Modular Size (nominal)	NRC*	CAC*	AC*	Fire Class*	Mold & Mildew Resistance	Sag Resistance (relative humidity)	Light Reflectance	Cleanroom Class	Embodied Carbon: Per 1m² (kg CO_2 - eq)	Embodied Carbon: Per 1ft² (kg CO_2 - eq)	Low VOC	Recyclable	Packaging Information: lbs/ sqft	Packaging Information: sqft/ carton
SLN Square Tegular Narrow	16220	4" x 24" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	24
	16230	4" x 48" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	16
	16240	4" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	30
	16250	4" x 72" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	36
	16221	6" x 24" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	24
	16231	6" x 48" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	16
	16241	6" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	30
	16251	6" x 72" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	36
	16222	12" x 24" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	16
	16232	12" x 48" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	32
	16242	12" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	30
	16252	12" x 72" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.69	36
SL Square Tegular	16420	4" x 24" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.58	24
	16430	4" x 48" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	16
	16440	4" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	30
	16450	4" x 72" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	36
	16421	6" x 24" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.58	24
	16431	6" x 48" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	16
	16441	6" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	30
	16451	6" x 72" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	36
	16422	12" x 24" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.58	24
	16432	12" x 48" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	48
	16442	12" x 60" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	30
	16452	12" x 72" x 1"	0.95	22	190	A	✓	up to 100%	0.85	ISO 5	4.15	0.386	✓	✓	0.59	36

** Items not UL Listed*

Product Compatibility

15/16" Suspension Systems	9/16" Suspension Systems
Chicago Metallic® 200, 1200 and Fire-Rated Systems	Chicago Metallic® 4000, 4200, 4500, 4600 and Fire-Rated Systems





Rockfon Sonar®

Accessories

	Detail	Rockfon Part Number	Product Number	Product Description	Packaging	
					Pcs/ Ctn	Lbs/ Ctn
General Clips*		250348	935.00	Universal Hold Down Clip	1000	16
		252923	425.01	Hold Down Clip for 5/8" Board 250/1250 Systems	200	2
		250343	820.00	Hold Down Clip for 5/8" Board 250/1250 Systems	1000	7
		237949	490.00	Hold Down Clip for 0"- 3/4" Panels (Black)	100	2
		237952	491.00	Hold Down Clip for 3/4" - 1-1/4" Panels (Blue)	150	2
		237954	492.00	Hold Down Clip for 1-1/2" Panels (Grey)	100	2
		250324	426.01	Butterfly Retention Clip for 0" - 1'' Panels	200	15
		250325	427.01	Butterfly Retention Clip for 1" - 2'' Panels	150	15
Tile Paint		307988	RFN941	Edge Paint for Field Cut Panels White – 1/2" pint. Brush included.	Can	1
		307989	RFN941Q	Edge Paint for Field Cut Panels White – 32 oz	Can	1

** Clips should be chosen as per tile thickness*

	Detail	Rockfon Part Number	Product Number	Product Description	Packaging	
					Pcs/ Ctn	Lbs/ Ctn
CDX Tiles Accessories		237264	-	CDX Perimeter Spring	100	1.1
		250338	478.00	Concealed Perimeter Clip	50	4.5
		314292	472.00	CDX/SCD Border Clip	100	1.1
		250334	474.01	24" Pre-mitered Vinyl Trim Kit for CDX and SCD only	50	1.4
		250335	475.01	48" Pre-mitered Vinyl Trim Kit for CDX and SCD Only	50	2
		250336	476.01	120" Vinyl Trim Piece Straight Cut	1	1
Shiplap Clip		250337	477.00	48" SLP Spline, for use with Rockfon Sonar 4x4 SLP	1	1

Scan for Full Accessories Guide

Scan for CDX & SCD Edge Installation Guide

Rockfon Sonar® Properties

Material
Stone wool (mineral wool) ceiling tiles with factory applied water-based paint and water-based lacquer on glass scrim surface.

ASTM E1264 Classification
ASTM E1264 (2022): Type IV, Form 3, Pattern E
ASTM E1264 (2023): Type A, Form A2.3, Pattern E

Acoustic Performance
Rockfon Sonar® Ceiling panels are tested for Noise Reduction Coefficient (NRC) and Ceiling Attenuation Class (CAC) according to the following ASTM standards:
- ✓ NRC – Tested to ASTM C423
- ✓ CAC – Tested to ASTM E1414

Fire Performance
Rockfon Sonar® tiles are tested for Surface Burning Characteristics to UL 723 (ASTM E84) for the US and CAN/ULC-S102 for Canada, and achieve:

Tested to US Standard UL 723 (ASTM E84):	Flame Spread Index: 0 Smoke Developed Index: 0
Canadian Standard CAN/ULC S102:	Flame Spread Rating: 10 Smoke Developed Classification: 5

Products with CAC 33 and over include high performance membrane with Flame Spread Index of 15 and Smoke Developed Index of 5

Mold and Mildew Resistance
Stone wool is inherently resistant to mold and mildew without added antimicrobials. Both, tile surface and substrate, are tested to:
- ✓ ASTM D3273 (Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings)
- ✓ ASTM C1338 (Standard Test Method for Determining Fungi Growth Resistance of Insulation Materials and Facings)

Humidity Resistance
Stone wool ceiling tiles are inherently humidity resistant and are tested to ASTM C367 (Standard Test Methods for Strength Properties of Prefabricated Architectural Acoustical Tile or Lay-In Ceiling Panels) and won't sag or warp even in 100% relative humidity

Cleaning
- ✓ Vacuum
- ✓ Damp cloth
- ✓ Rockfon Sonar® tiles are able to be washed through 100 cycles of the standard washability tester and cleaner prescribed in ASTM D4828.
- ✓ Rockfon Sonar® panels can withstand up to 200 scrub cycles using the prescribed scrubber and force per ASTM D2486.
- ✓ Rockfon Sonar® can be safely treated with a number of cleaning solutions and are resistant to diluted solutions of ammonia, chlorine, quaternary ammonium and hydrogen peroxide as described in ASTM D1308

Thermal Resistance
R 3.47 hr.ft².°F/Btu per 1 inch (I-P)
R 0.61 m².K/W per 25.4 mm (SI)

Clean Room
ISO Class 5

Warranty
30-Year Limited Product Warranty.
See rockfon.com

Sustainability

Transparency
- ✓ Environmental Product Declaration (Product-Specific, Type III)
- ✓ Health Product Declaration
- ✓ Declare Label

Applicable to all edge types

Low-Emitting Materials
UL GREENGUARD Gold certified for low VOC (chemical) emissions and meet the California Department of Public Health (CDPH) Standard Method v1.2-2017 for offices and classroom environments

Embodied Carbon
Global Warming Potential (GWP) kg of CO_2-eq (per functional unit) from stages A1 - A3 for SQ Edge:
4.15 kg CO_2-eq (per 1m²) / 0.386 kg CO_2-eq (per 1f²)
For all other edge types, refer to p. 2-4.

Rockcycle - Closed Loop Recycle Program
All stone wool ceiling tiles are eligible for the Rockcycle program. Please contact rockcycle@rockfon.com for more information

Discover Rockfon Sonar®
on Ecomedes and see how it aligns with the Common Materials Framework (CMF).

Find us on
MasterSpec®
Powered by Deltek Specpoint®

BIM/Revit objects available at:
rockfon.com/products/rockfon-sonar/

Subject to alterations in range and product technology without prior notice. Rockfon® accepts no liability for errors. ROCKWOOL A/S 2025. Rockfon® is a brand of ROCKWOOL Group. All rights reserved. R denotes a trademark that is registered in the United States of America.